


# CERAMAGUARD (100% RH)

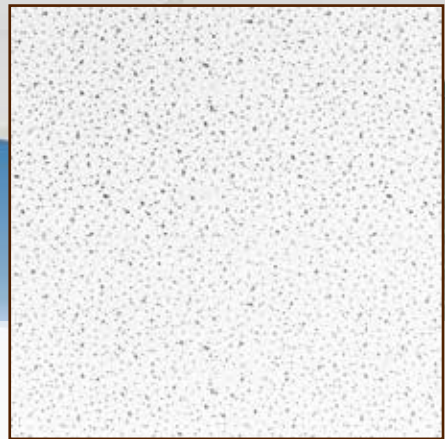

Inspiring Great Spaces™

**Armstrong**®  
CEILING SOLUTIONS

# CERAMAGUARD (100% RH)



## CERAMAGUARD

## BOARD



Prelude 24 - XL2/TLX  
Prelude 24 CR\* - TLX  
Clean Room 24



600 x 600 x 15 mm  
1200 x 600 x 15 mm


607 M  
608 M



EN ISO 354 &  
EN ISO 11654

| $\alpha_w$      | NRC  | 125  | 250  | 500  | 1000 | 2000 | 4000 | Hz         |
|-----------------|------|------|------|------|------|------|------|------------|
| <b>0.55(MH)</b> | 0.60 | 0.25 | 0.30 | 0.50 | 0.80 | 0.85 | 0.75 | $\alpha_p$ |

**Class D**

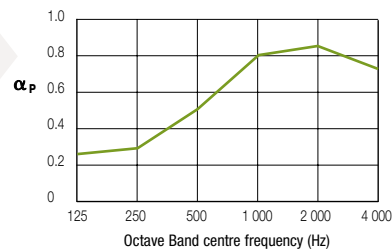

EN 20140-9  
& EN 717-1

|                             |  |
|-----------------------------|--|
| <b><math>D_{ncw}</math></b> |  |
| <b>39 dB</b>                |  |



|            |              |
|------------|--------------|
| EEA        | Euroclass A1 |
| EN 13501-1 |              |

|        |          |
|--------|----------|
| RUS    | KM0 (NG) |
| FZ 123 |          |



EN 12667  
& ISO 8301

$\lambda = 0.067$  W/m K



100 % RH



7.3 kg/m<sup>2</sup>  
20 kg/m<sup>2</sup> if wet

\*CERAMAGUARD must be installed on Prelude 24 Corrosive Resistant (CR 24 mm) grid where humidity regularly exceeds 95% RH. CERAMAGUARD may need to have main runners at 600 mm centres due to increased weight in high humidity conditions.

Please contact our Armstrong Technical Sales Group for further details.

[www.armstrongceilings.eu](http://www.armstrongceilings.eu)

**Armstrong**<sup>®</sup>  
CEILING SOLUTIONS

