



# CIRRUS CONTRAST

Inspiring Great Spaces™

**Armstrong**<sup>®</sup>  
CEILING SOLUTIONS

# CIRRUS CONTRAST



61%  
EN ISO  
14021

Recycled Content



83%  
EN ISO  
7724-2 & 3

Light Reflectance




Intelligibility

## CIRRUS CONTRAST

### CIRCLES




### SQUARES



### MICROLOOK



Prelude 15 - XL<sup>2</sup>/TL  
Interlude HRC - XL<sup>2</sup>



600 x 600 x 15 mm

9902 M

9903 M



EN ISO 354 &  
EN ISO 11654


$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
0.55	0.50	0.40	0.40	0.45	0.55	0.60	0.65	$\alpha_p$

Class D



EN 20140-9  
& EN 717-1

$D_{ncw}$	36 dB
-----------	-------

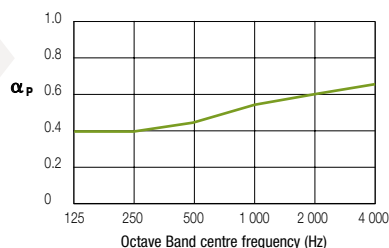

EEA Euroclass A2-s1, d0  
EN 13501-1

RUS KM1 (G1, V1, D1, T1)  
FZ 123



EN 12667  
& ISO 8301

$\lambda = 0.060$  W/m K



95 % RH



15 YEAR  
guarantee



30 YEAR  
system  
guarantee



4.3 kg/m<sup>2</sup>

Please contact our Armstrong Technical Sales Group for further details.

[www.armstrongceilings.eu](http://www.armstrongceilings.eu)

**Armstrong**  
CEILING SOLUTIONS