

NEWTONE (100% RH)

Inspiring Great Spaces®

Armstrong®
CEILING SOLUTIONS

NEWTONE (100% RH)



Light Reflectance




Confidentiality

NEWTONE

BOARD



Prelude XL² / TLX 24 mm / *Prelude 24 CR - TLX / Clean Room 24




600 x 600 x 6 mm

1201 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.10(L)	0.10	0.25	0.15	0.10	0.10	0.10	0.05	α_p
Not classified								

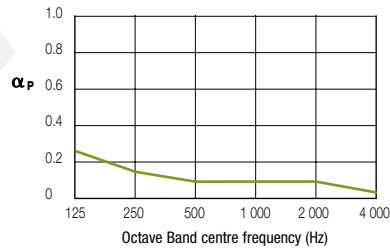

EN 20140-9
& EN 717-1

D_{ncw}	
37 dB	



EEA Euroclass A2-s1, d0	RUS KMO (NG)
EN 13501-1	FZ 123



100 % RH

15 YEAR
guarantee

30 YEAR
system
guarantee



≈ 8.0 kg/m²

*In all environments where humidity conditions could regularly reach and/or exceed 90% RH we recommend the use of our Corrosion Resistant grids and associated accessories.



Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu



Armstrong[®]
CEILING SOLUTIONS