

OPTIMA

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS


OPTIMA



OPTIMA	BOARD	TEGULAR 90	MICROLOOK 90	VECTOR
	 Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	 Prelude 24 - XL ² /TLX Prelude 24 Sixty ² - XL ² /TLX	 Prelude 15 - XL ² /TL Interlude HRC - XL ² Silhouette 3/6mm - XL ²	 Prelude 24 - XL ² Prelude 24 Sixty ² - XL ²
OPTIMA 15 mm				
600 x 600 x 15 mm	2327 M	2329 M	2331 M	
1200 x 600 x 15 mm	2328 M	2330 M	2332 M	
OPTIMA 20 mm				
600 x 600 x 20 mm	2335 M	2349 M	2363 M	
1200 x 600 x 20 mm			2364 M	
1800 x 600 x 20 mm	2337 M			
1200 x 1200 x 20 mm	2338 M	2352 M	2366 M	
OPTIMA 22 mm				
600 x 600 x 22 mm				2387 M
1200 x 600 x 22 mm				3413 M
OPTIMA 25 mm				
600 x 600 x 25 mm	2379 M	2381 M	2383 M	

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
• Board, TEGULAR 90, MicroLook 90 15 mm	0.90	0.90	0.35	0.75	1.00	0.80	0.90	0.95	α_p
• Board, TEGULAR 90, MicroLook 90 20 mm	0.95	0.95	0.40	0.80	1.00	0.85	1.00	1.00	α_p
• Board, TEGULAR 90, MicroLook 90 25 mm	1.00	1.00	0.50	0.85	1.00	0.95	1.00	1.00	α_p
• Vector 22 mm	1.00	0.95	0.35	0.80	1.00	0.90	1.00	1.00	α_p

Class A

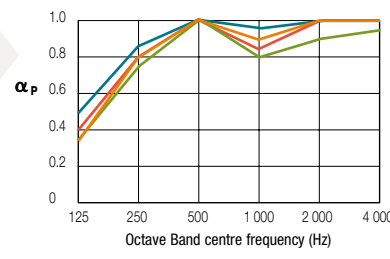

	D_{nfw} 24 dB (OPTIMA 25 mm)
--	---

EN ISO 10848-2 & EN ISO 717-1

	R_w 7 dB (OPTIMA 15 mm)
--	--

EN ISO 140-3 & EN ISO 717-1

	EEA Euroclass A2-s1, d0 EN 13501-1
--	---------------------------------------

RUS	KM2 (G1, V2, D1, T1) FZ 123
-----	--------------------------------

	$\lambda = 0.032$ W/m K EN 12667 & ISO 8301
	95 % RH

15 YEAR guarantee
30 YEAR system guarantee

	15 mm: 1.5 kg/m ² 20 mm: 2.0 kg/m ² 22 mm: 2.8 kg/m ² 25 mm: 2.5 kg/m ²
--	--

Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu



03/2016 Armstrong Building Products R.C.S. Besançon B 764 131 575 Printed in E.C. on chlorine free paper from sustainable resources.