


CERAMAGUARD (100% RH)

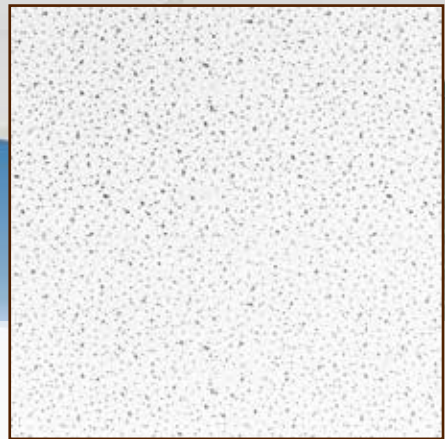

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS

CERAMAGUARD (100% RH)



CERAMAGUARD

BOARD



Prelude 24 - XL2/TLX
Prelude 24 CR* - TLX
Clean Room 24



600 x 600 x 15 mm
1200 x 600 x 15 mm


607 M
608 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(MH)	0.60	0.25	0.30	0.50	0.80	0.85	0.75	α_p

Class D

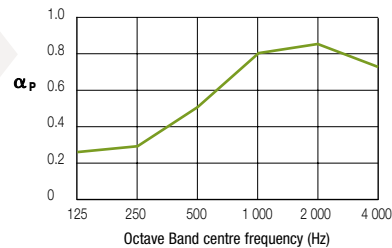

EN 20140-9
& EN 717-1

D_{ncw}	
39 dB	



EEA	Euroclass A1
EN 13501-1	

RUS	KM0 (NG)
FZ 123	



EN 12667
& ISO 8301

$\lambda = 0.067$ W/m K



100 % RH



7.3 kg/m²
20 kg/m² if wet

*CERAMAGUARD must be installed on Prelude 24 Corrosive Resistant (CR 24 mm) grid where humidity regularly exceeds 95% RH. CERAMAGUARD may need to have main runners at 600 mm centres due to increased weight in high humidity conditions.

Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu

Armstrong[®]
CEILING SOLUTIONS

