



BIOGUARD ACOUSTIC
(ISO 5)

Inspiring Great Spaces™

Armstrong®
CEILING SOLUTIONS

BIOGUARD ACOUSTIC (ISO 5)



BIOGUARD

BOARD

TEGULAR

MICROLOOK





Prelude 24 - XL²/TLX / Prelude 24 CR - TLX
Clean Room 24



Prelude 24 - XL²/TLX
Clean Room 24



Prelude 15 - XL²/TL
Interlude HRC - XL²



600 x 600 x 17 mm
625 x 625 x 17 mm
1200 x 600 x 17 mm

2549 M
2703 D
2550 M

2551 M
2551 D


2552 M
2552 D



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
• 0.60(H)	0.60	0.35	0.40	0.50	0.70	0.85	0.90	α_p

Class C

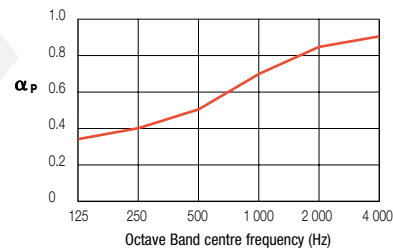

EN ISO 10848-2
& EN ISO 717-1

D_{nfw}
36 dB



EN ISO 140-3
& EN ISO 717-1

R_w
18 dB



EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667
& ISO 8301

$\lambda = 0.060$ W/m K



ISO 14644-1

ISO 5



95 % RH



15 YEAR
guarantee



30 YEAR
system
guarantee



4.5 kg/m²

03/2016 Armstrong Building Products R.C.S. Besançon B 784 131 575 Printed in E.C. on chlorine free paper from sustainable resources.



Please contact our Armstrong Technical Sales Group for further details.

www.armstrongceilings.eu

Armstrong
CEILING SOLUTIONS