



PLAIN

Inspiring Great Spaces™

**Armstrong**<sup>®</sup>  
CEILING SOLUTIONS

# PLAIN



**37-40%**  
EN ISO 14021







Recycled Content



**87%**  
EN ISO 7724-2 & 3

Light Reflectance

## PLAIN


	BOARD	TEGULAR	MICROLOOK
			
	Prelude 24 - XL <sup>2</sup> /TLX Prelude 24 Sixty <sup>2</sup> - XL <sup>2</sup> /TLX	Prelude 24 - XL <sup>2</sup> /TLX Prelude 24 Sixty <sup>2</sup> - XL <sup>2</sup> /TLX	Prelude 15 - XL <sup>2</sup> /TL Interlude HRC - XL <sup>2</sup>
			
600 x 600 x 15 mm	9587 M	9589 M	9590 M
625 x 625 x 15 mm	9587 D	9589 D	9590 D
1200 x 600 x 15 mm	9588 M		
1250 x 625 x 15 mm	9588 D		



EN ISO 354 &  
EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.20(L)</b>	0.20	0.30	0.25	0.15	0.15	0.25	0.30	$\alpha_p$

**Class E**

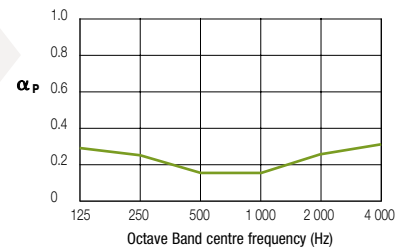

EN ISO 10848-2  
& EN ISO 717-1

$D_{nfw}$
<b>35 dB</b>



EEA Euroclass A2-s1, d0	RUS KM1 (G1, V1, D1, T1)
EN 13501-1	FZ 123



EN 12667  
& ISO 8301

$\lambda = 0.060$  W/m K



95 % RH



**15 YEAR**  
guarantee



**30 YEAR**  
system  
guarantee



≈ 3.5 kg/m<sup>2</sup>



Please contact our Armstrong Technical Sales Group for further details.

[www.armstrongceilings.eu](http://www.armstrongceilings.eu)

**Armstrong**  
CEILING SOLUTIONS

